




版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	18.10.19		新增	王洪松

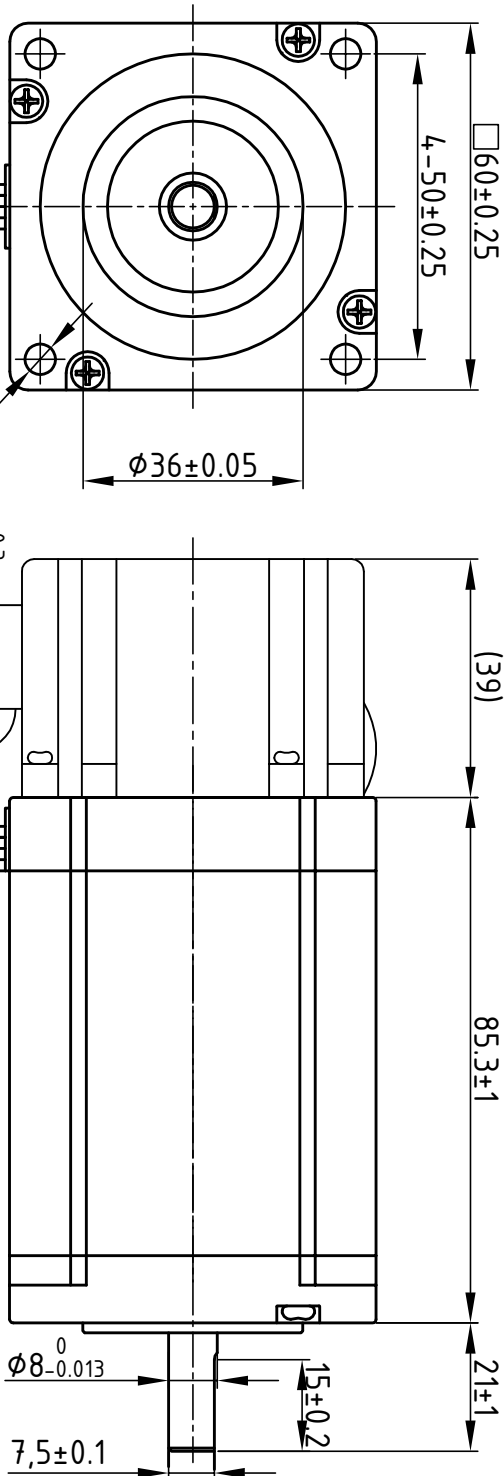

Motor Connctions:

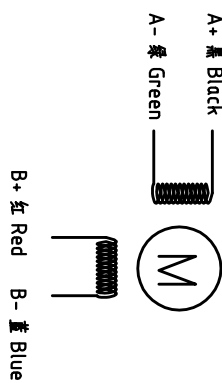

Brake Connections



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500V/AC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 450g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	3.3 V
DC Resistance/phase ±10%	0.43Ω
Inductance/phase ±20%	2.0 mH
Holding torque	3.0 N·M
Inertia	0.69 kg·cm ²
Weight	1.3 kg

设计 Designed	王洪松	日期 Date	2018.10.19	材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2018.10.19		第一角画法 First angle projection			混合式步进电机 60CM30X-BZ
批准 Approved	黄捷建	2018.10.19		重量 Weight	比例 Scale	图例 Stage Mark	
图号 Part No.				共 1 套 1 套	第 1 套 1 套	Sheet 1 of 1	
				图号 DWG. NO.			