

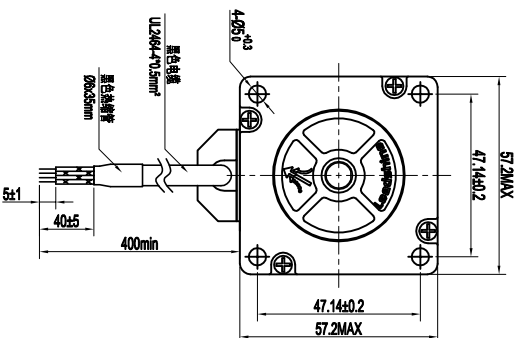

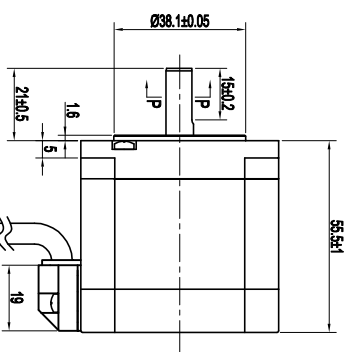


DIMENSIONS Unit:mm

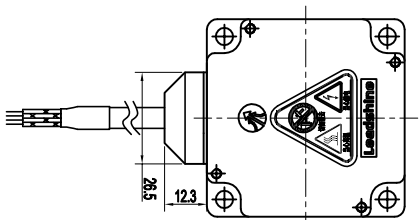

□ 电机接线图

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Current/phase	4.0 A
Voltage	168 V
DC Resistance/phase ±10%	0.42 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.3 kg·cm ²
Weight	0.72 kg

设计 Designed	何时强	日期 Date	2021.04.28	材料 Material	第一套图 First angle projection			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2021.04.28		第一套图 First angle projection	比例 Scale	图章 Stamp	混合式步进电机	
批准 Approved	黄捷建	2021.04.28		A/01			57CM13-0-18 MS30	
零件号 Part No.	LS-MT-01-07A	共 1 套 Total	第 1 套 No. 1 of 1	图章 Stamp	DMG NO.	LS-57CM13-0-18 MS30		

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪林