

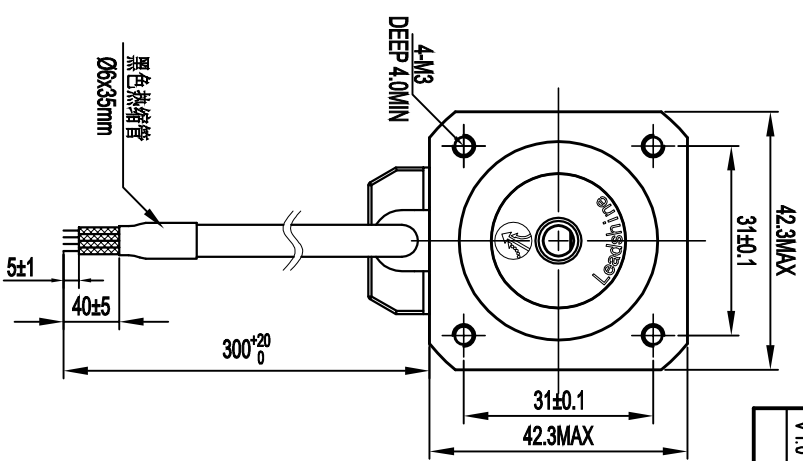

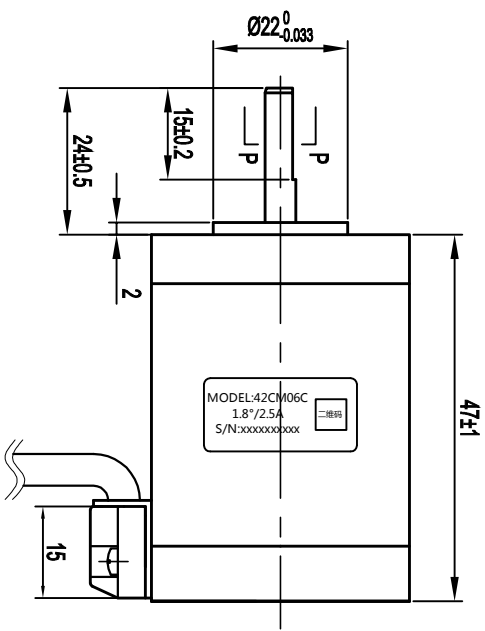


Dimension: (Unit: mm)

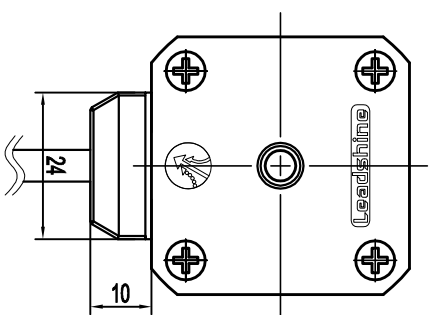

Common Rating

Step angle	1.8°
Position accuracy	18±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.85 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	0.6 N·M
Detent torque	0.068 N·M
Inertia	0.09 kg·cm ²
Weight	0.4 kg

设计 Designed	王洪松	日期 Date	2020.04.16	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2020.04.16	第一角画法 First angle projection	比例 Scale	混合式步进电机
批准 Approved	黄捷建	2020.04.16	版本 A/01	图号 DWG. NO.	42CM06C
零件图号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1			

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪松