


DIMENSIONGS Unit:mm


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪林

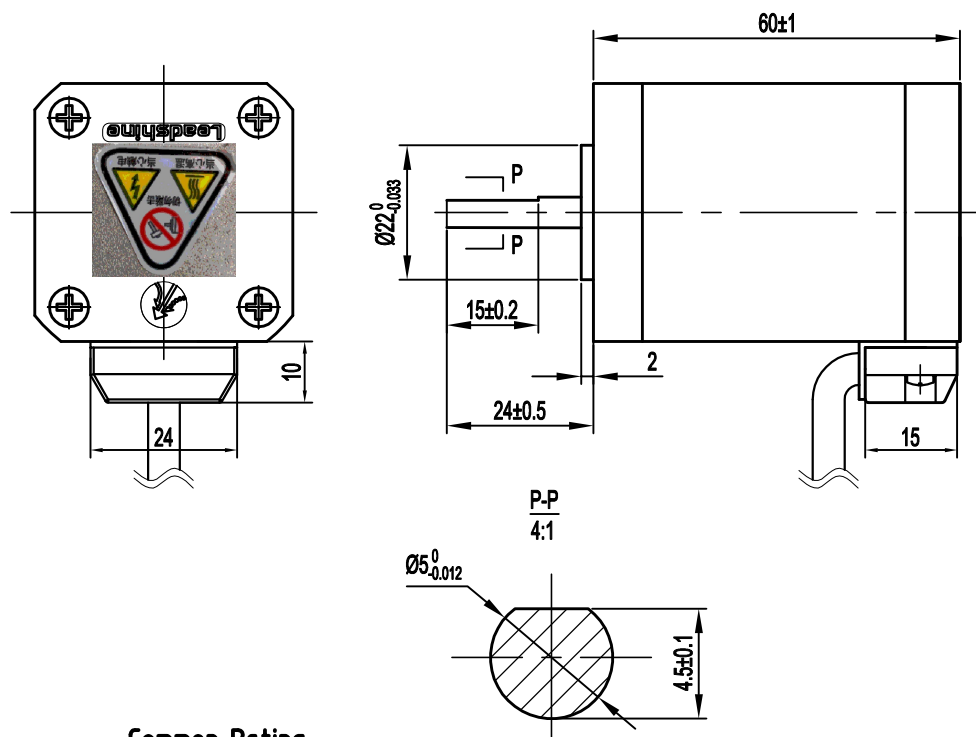


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	2.5 V
DC Resistance/phase ±10%	1 Ω
Inductance/phase ±20%	2.4 mH
Holding torque	0.8 N•M
Inertia	0.11 kg•cm ²
Weight	0.5 kg

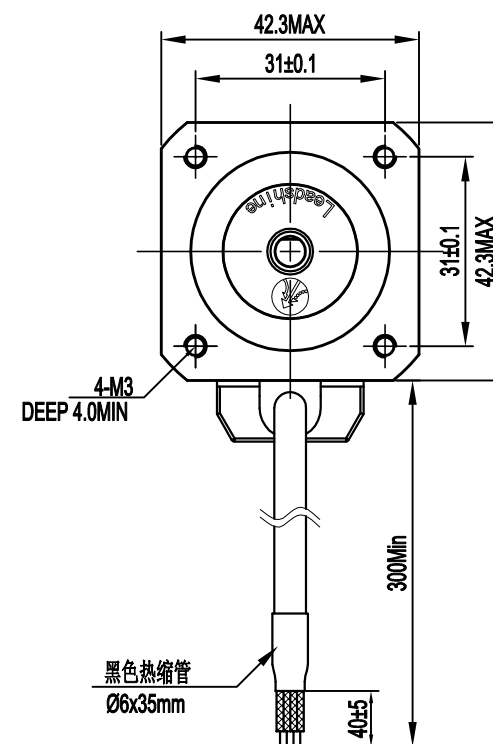

电机接线图



设计 Designed	日期 Date	2020.04.16	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2020.04.16		第一角画法 First Angle projection	名称 Title
批准 Approved	2020.04.16		版本/版次 A/01	混合式步进电机
图号 DWG. NO.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	比例 Scale	42CM08 MS20
图号 DWG. NO.	LS-42CM08 MS20			