

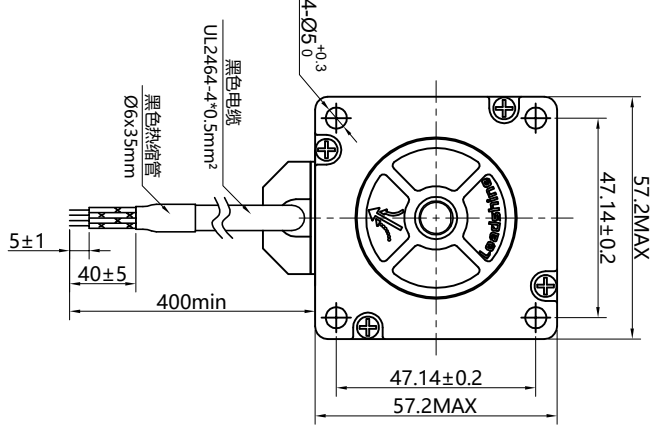
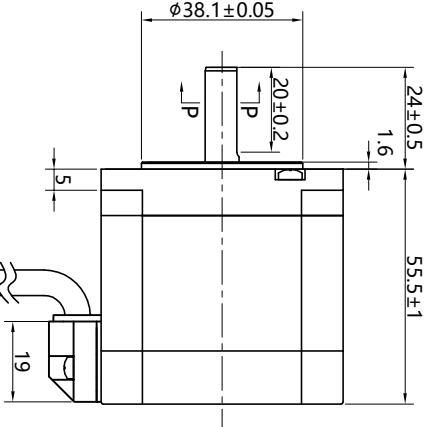


Dimension: (Unit: mm)

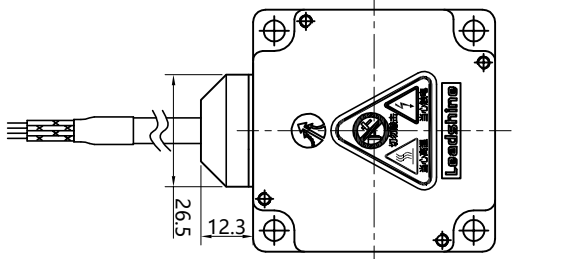

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase ±10%	0.4,2 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.300 kg·cm ²
Weight	0.7 kg

励磁顺序VS旋转方向
从电机的安装面看为逆时针方向

STEP	A	B	A ⁻	B ⁻
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CCW

CW

设计 Designed	杨陶	2022-10-09	标准化 Standardization		材料Material:	名称Title	开环步进电机
制图 Drawn	杨陶	2022-10-09				型号Model	570M13-18-S24 MS30
校对 Proofread			审核 Checked	王洪松	2022-10-09	重量Weight/g:	570M13-18-S24 MS30
工艺 Processed			批准 Approved	黄建建	2022-10-09	阶段标记 Stage Mark	料号 Part No.
表单编号 Form No.	LS-MT-01-07B		版本/版次 Bottom Serial NO.	A/01	共1页第1页 Page of 1	比例Scale	1:1

雷赛智能
Leadshine