

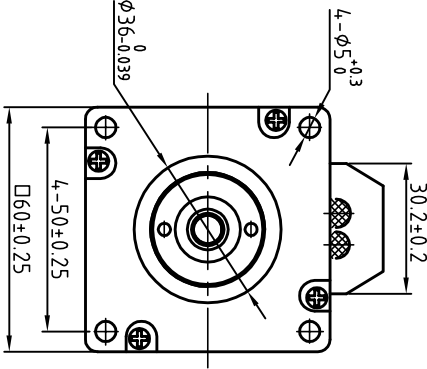



Dimension: (Unit: mm)

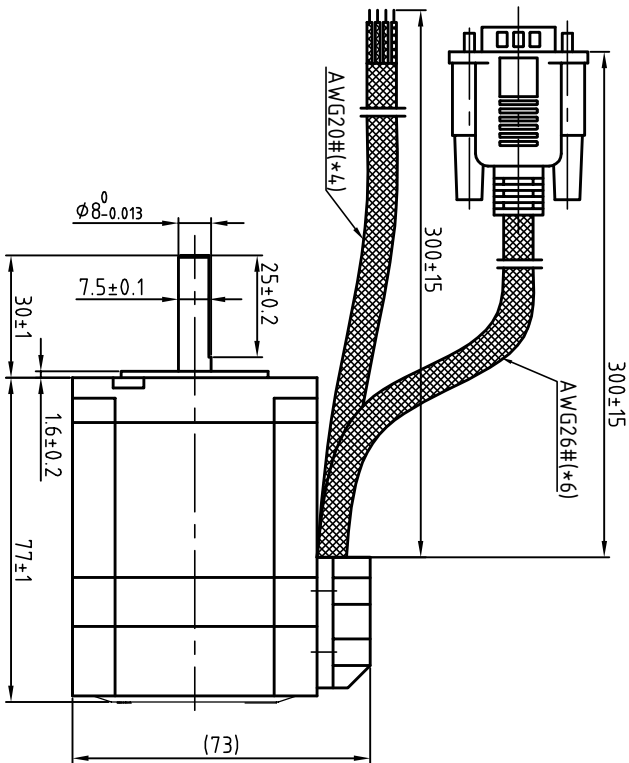

Motor Connctions:



Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	4.0 A
Voltage	1.8 V
DC Resistance/phase ±10%	0.45 Ω
Inductance/phase ±20%	1.25 mH
Holding torque	15 N·M
Inertia	0.34 kg·cm ²
Weight	0.8 kg
Encoder resolution	1000 cpr

技术要求:

- 1、未注形位公差按GB/T 1184-K;
 - 2、未注尺寸公差按GB/T 1804-m。
- (除非另外指定)

设计 Designed	杨陶	2022-06-15	标准化 Standardization		名称Title	闭环步进电机
制图 Drawn	杨陶	2022-06-15			型号Model	600ME15X-S30 MS20
校对 Proofread			审核 Checked	王洪松	重量Weight/g:	
工艺 Processed			批准 Approved	黄桂建	阶段标记 Stage Mark	图号DWG No.)
表单编号 Form No.	LS-MT-01-07B		版本/版次 Edition/Serial NO.	A/01	共1页第1页 Page of 1	料号Part No.)
					比例Scale	1:1
						雷赛智能 Leadshine