
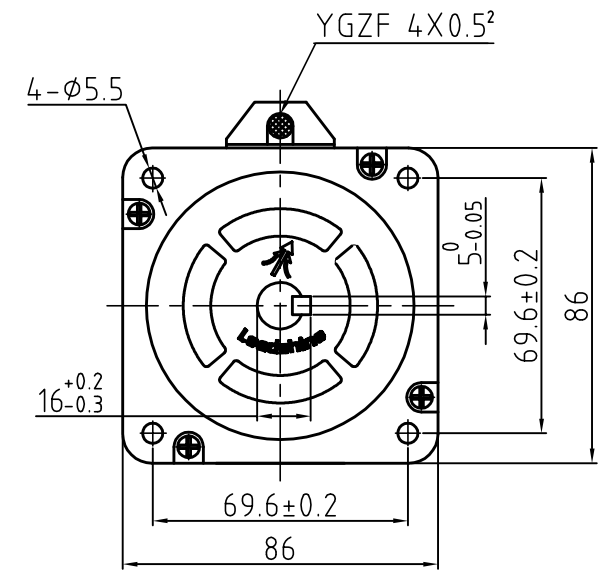


Dimension: (Unit: mm)

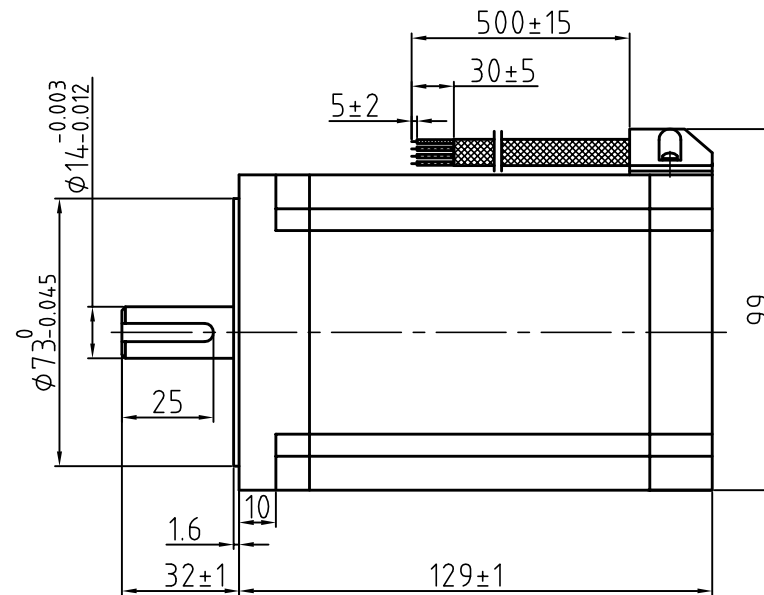


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	4.5 V
DC Resistance/phase	±10% 0.75 Ω
Inductance/phase	±20% 5 mH
Holding torque	12 N·M
Inertia	2.94 kg·cm²
Weight	4.45 kg

Motor Connctions

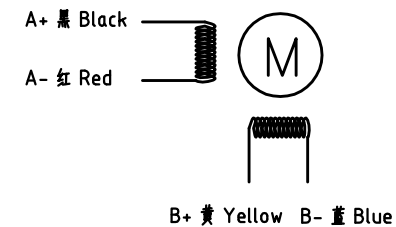

设计 Designed	王洪松	日期 Date	20.08.09	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄维建	20.08.09	第一角画法 First Angle projection	名称 Title	混合式步进马达
批准 Approved	黄维建	20.08.09	版本/版次 A/01	比例 Scale	86CM120C
零件编号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	LS-86CM120C	