
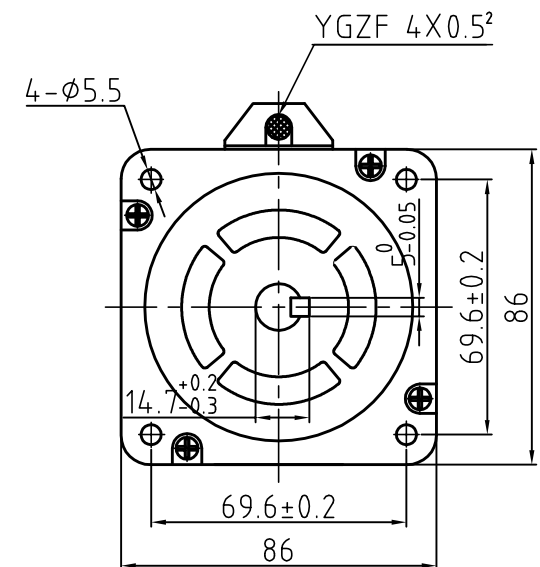
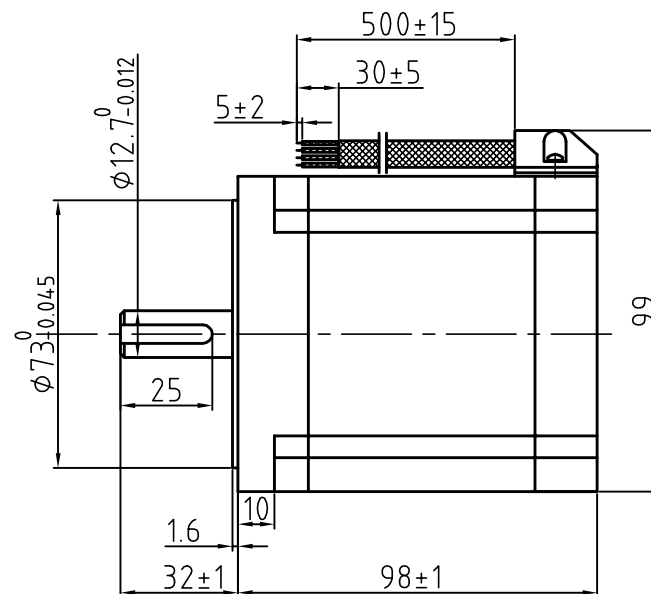


Dimension: (Unit: mm)

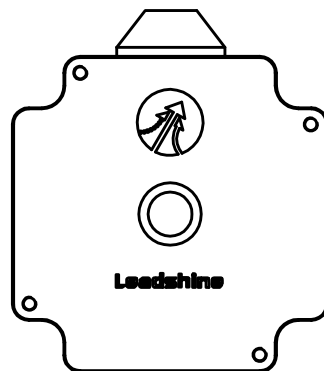


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.5 Ω
Inductance/phase	4.2 mH
Holding torque	8.5N·M
Inertia	2.8 kg·cm²
Weight	4 kg

Motor Connections

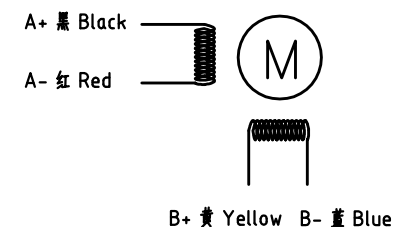

设计 Designed	王路松	日期 Date	17.11.08	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建		17.11.08	第一角画法 First Angle projection	名称 Title
批准 Approved	黄捷建		17.11.08	版本/版次 Scale	混合式步进马达
规格编号 Part No.	LS-MT-01-07A	比例 A/01	图号 DWG. NO.	图号 LS-86CM80	图号 LS-86CM80